

54M Wireless Router TL-WR340G



Share data wirelessly
and surf the internet, email,
net chatting

Classic black & white model,
for home and office use

Up to 54Mbps wireless data rate
and fully Compatible with
IEEE 802.11g/b products




Description:

The 54Mbps Wireless Router TL-WR340G is dedicated to Small Office/Home Office (SOHO) Wireless network solutions. It integrates the function of wireless access point, firewall, 4-port Switch and the NAT-Router. It helps you set up a wired or wireless network, lets your computers share a high-speed DSL or Cable Internet connection data files and other resources such as printers and hard disk storage space. Offering easy-to-use Quick Setup Wizard, basic routing and advanced security function, the TL-WR340G is your best choice to setup a secure wireless network easily for your home and office.

Specifications:

Standards	IEEE 802.11g IEEE 802.11b
Interface	4 10/100M auto-sensing LAN Port(Auto MDI/MDIX) 1 10/100M auto-sensing WAN Port(Auto MDI/MDIX)
Wireless Signal Rates	11g: 54/48/36/24/18/12/9/6M(dynamic)
With Automatic Fallback	11b: 11/5.5/2/1M(dynamic)
Frequency Range	2.4-2.4835GHz
Wireless Transmit Power	17dBm(Max)
Antenna	3dBi fixed Omni directional antenna
Modulation Technology	IEEE 802.11b: DQPSK, DBPSK, DSSS, and CCK IEEE 802.11g: BPSK, QPSK, 16QAM, 64QAM, OFDM
Receiver Sensitivity	54M: -68dBm@10% PER 11M: -85dBm@8% PER 6M: -88dBm@10% PER 1M: -90dBm@8% PER 256K: -105dBm@8% PER
Power Supply Unit	Input: localized to country of sale Output: 9VAC / 0.8A linear PSU
Operating Temperature	0°C~40°C (32°F~104°F)
Storage Temperature	-40°C~70°C (-40°F~158°F)
Relative Humidity	10% ~ 90%, non condensation
Storage Humidity	5%~95% non-condensing
Dimensions	6.30×4.02×1.10(in.) 160×102×28 mm (without antenna)

Diagram:

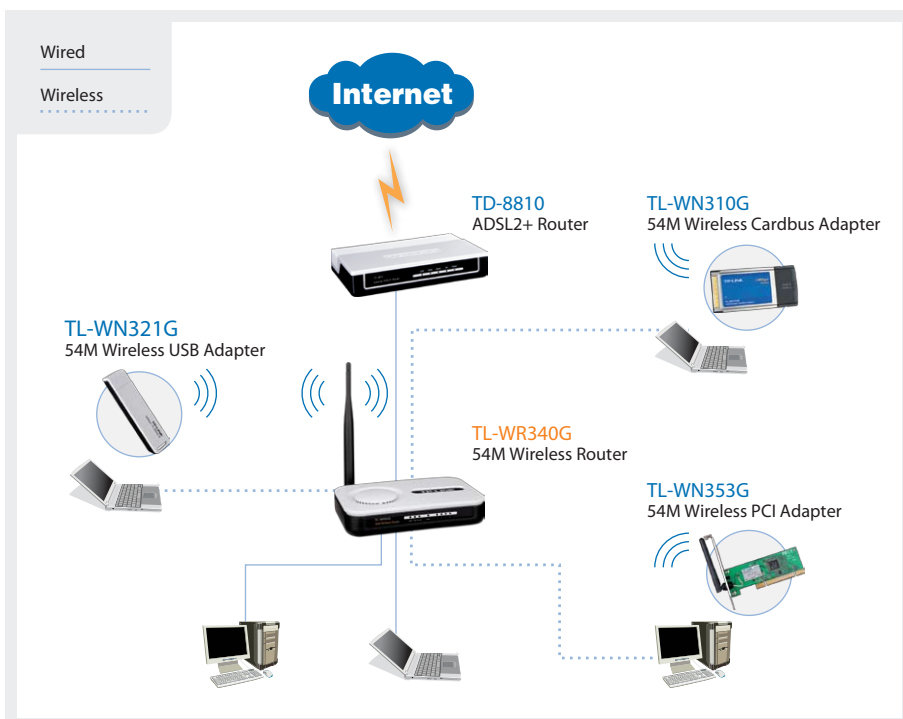

Features:

- Supports 54/48/36/24/18/12/9/6Mbps or 11/5.5/2/1Mbps data transfer rates.
- Shares data and Internet access for users, supporting PPPoE, Dynamic IP, Static IP, L2TP, PPTP, BigPond Cable Internet access.
- Built-in firewall supporting IP address filtering, Domain Name filtering, and MAC address filtering, Supports Flow Statistics,
- Supports Virtual Server, Special Application and DMZ host, Supports UPnP, Dynamic DNS, Static Routing, VPN Pass-through.
- Supports time-based access control
- Supports wireless bridge mode
- Provides 64/128/152-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK data security and TKIP/AES encryption, Wireless LAN ACL (Access Control List).
- Supports web-site firmware upgrade, Remote and local Web management.

Package:

- 54M Wireless router TL-WR340G
- Power supply unit (localized to country of sale)
- Resource CD
- Quick Setup Guide

Related Products:

- 54M Wireless USB Adapter TL-WN322G
- 54M Wireless PCI Adapter TL-WN353G
- SOHO Cable/DSL Router TL-R460
- External ADSL2+ Router TD-8810

Specifications are subject to change without notice. TP-LINK is a registered trademark of TP-LINK Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from TP-LINK Technologies Co., Ltd.